



SKOXA[®]
SAFETY REDEFINED

Architectural
Hardware Solutions
2nd Edition



SKOXA[®]
SAFETY REDEFINED



About us

SKOAA is the culmination of a vision and a lifelong dream of some of the most prolific individuals in the Glass/Building Material arena. SKOAA leadership team has a deep rooted history in the Glass & Construction Industry, which dates back to late 20th Century.

We at SKOAA look forward to serving our customers with a wide range of innovative and sustainable products. Our main objective is to provide complete solution to Architectural Glass Hardware Segment, while delivering world class premium products at the most competitive prices.

SKOAA promises to bring best quality, clutter breaking products to our customers that will last them a life time. Our products are compliant with EN 1154, CE Certified and tested by Intertek as per EN Standards.

Vision

**"We should be the preferred
choice for Architectural Glass
Hardware Solutions in India "**

EN 1154



intertek
Total Quality. Assured.



INDEX

| | |
|---|-------|
| Glass Door Solutions & System | 1 |
| FLOOR SPRINGS | 2-3 |
| HYDRAULIC PATCH FITTINGS | 4-6 |
| PATCH FITTINGS | 7-8 |
| PATCH LOCKS | 9 |
| GLASS DOOR SLIDING SYSTEM | 10-11 |
| GLASS DOOR HANDLES | 12-13 |
| Shower Enclosure Solutions & System | 14-15 |
| SHOWER HINGES | 16-17 |
| GLASS CONNECTORS | 18 |
| SHOWER SLIDING SYSTEM | 19-20 |
| SHOWER ACCESSORIES | 21-22 |
| PVC SEALS | 23 |
| Spider & Canopy Fittings | 24 |
| SPIDER FITTINGS WITHOUT FIN | 25 |
| SPIDER FITTINGS WITH FIN | 25 |
| SPIDER ACCESSORIES | 26 |
| CANOPY SYSTEMS | 27 |
| 360° Solutions by SKOAA | 28 |
| DEMISTA MIRROR HEATING PAD & HYDROPHOBIC COATING FOR GLASS & HARDWARE | 29 |
| Customer's Perspective of SKOAA | 30 |
| Our Clients | 31 |

Glass Door Solutions & System

Glass door solutions & system empower the designers to create, visualize and turn their imagination into reality. Playing with toughened glass has become much more easier with these hardware. Transparency of glass is maintained in each series of glass door hardware. Our hardware undergoes stringent test in terms of safety and functionality.

FLOOR SPRING

NON DIGGING HYDRAULIC PATCH FITTING

PATCH FITTINGS

PATCH LOCKS

SLIDING SYSTEM


GLASS DOOR HANDLE



FLOOR SPRINGS


SFS- 74

Single Cylinder Floor Spring
With Closing Force EN 3



Specifications

- Applicability : Glass door, Wooden door, Aluminum door
- Max. Door opening angle: 130 degrees
- Closing speed : 130-15°
- Final closing speed : 15-0°
- Hold Open (standard): 90° hold open
- Installation dimension: Length-274mm, Width-97mm, Height-40mm
- Closing speed adjustment: yes
- Removable spindle: NO
- Applicable temperature: -15~40 degrees C
- CE certified : Yes
- Tested as per : EN 1154

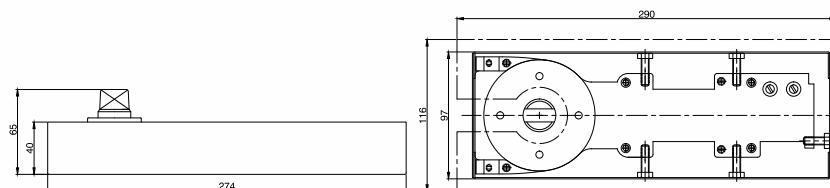

Finishes :




Matte Black (MB) Gold (GD) Copper (CO)




SFS- 84

Cam Action Double Cylinder Floor Spring
with Closing Force EN 3

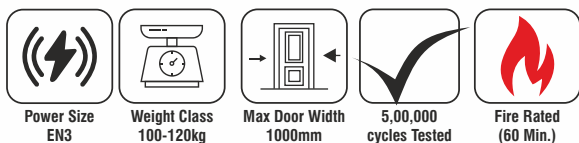

Specifications

- Applicability : Glass door, Wooden door, Aluminum door
- Closing speed : 130-15°
- Final closing speed : 15-0°
- Hold Open (standard): 90° hold open
- Weight of floor spring approx : 6kg
- Installation dimension: Length-308mm, Width-108mm, Height-40mm
- Tested to : 5,00,000 cycles
- Tested as per : EN 1154
- CE certified : Yes

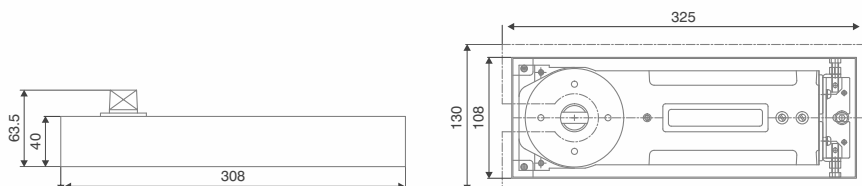


Finishes :



Matte Black (MB) Gold (GD) Copper (CO)




FLOOR SPRINGS




SFS- 94

Cam Action Double Cylinder Floor Spring
with Closing Force EN 4

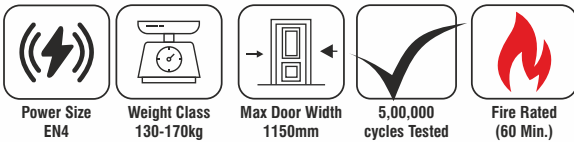


Specifications

- Applicability : Glass door, Wooden door, Aluminum door
- Dual valve adjusting, closing and latching speed
- Closing speed : 130-15°
- Final closing speed : 15-0°
- Hold Open (standard): 90° hold open
- Weight of floor spring approx : 6kg
- Installation dimension: Length-308mm, Width-108mm, Height-40mm
- Tested as per : EN 1154
- CE certified : Yes

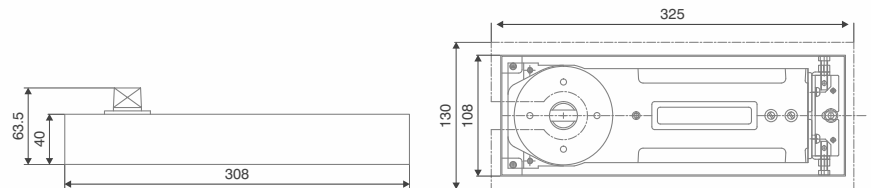


SFS- 14000

Cam Action Double Cylinder Floor Spring
with Closing Force EN 6 (Heavy Duty)

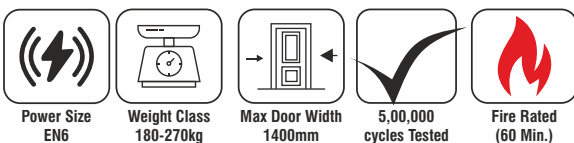

Specifications


- Applicability : Glass door, Wooden door, Aluminum door
- Max. Door opening angle: 130 degrees
- Closing speed : 130-15°
- Final closing speed : 15-0°
- Hold Open (standard): 90° hold open
- Installation dimension: Length-306mm, Width-108mm, Height-40mm
- Closing speed adjustment: yes
- Removable spindle: NO
- Applicable temperature: -15~40 degrees C
- CE certified : Yes
- Tested as per : EN 1154 & EN 1634

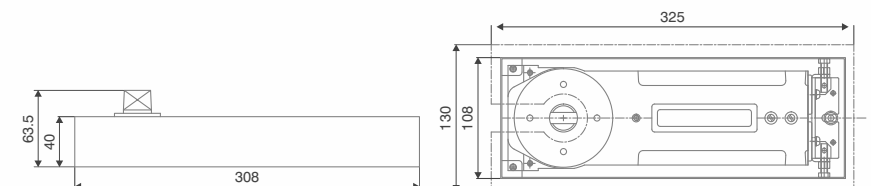

FLOOR SPRINGS



SFS- 30000

Single Cylinder Floor Spring
with Closing Force EN 6 (Heavy Duty)

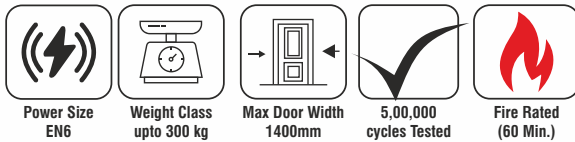


Specifications

- Applicability : Steel door, glass door and heavy door
- Dual valve adjusting, closing and latching speed
- Hold Open (standard): 90° hold open
- Installation dimension: 341mm(L)* 60 mm(W)* 78 mm(H)
- Tested as per : EN 1154 & 1634
- CE certified : Yes
- Interchangeable spindle from 5 mm to 50 mm available
- Option to choose from delayed action & hold open function
- Uses Hydraulic Control

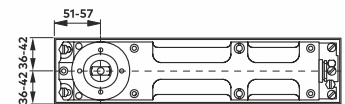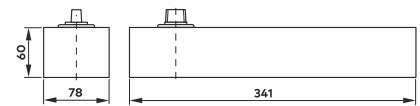


SHPF-WD-100

Concealed Hydraulic Patch Fitting
(For wooden door)

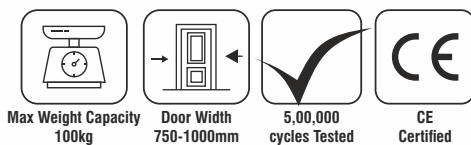

Specifications

- Quick and easy installation
- Suitable door thickness: 40mm
- Angle of opening: 150°
- Smooth soft movement
- Low installation cost & time
- Hold open standard: Hold open at 90°
- Finish: SSS
- Grade: 304
- Tested as per: EN 1154

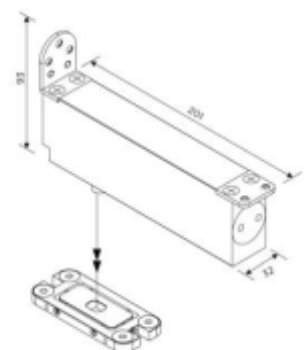


NON DIGGING HYDRAULIC PATCH FITTING

Finishes :



SHPF-100

Non Digging Concealed
Floor Spring / Hydraulic Patch Fitting

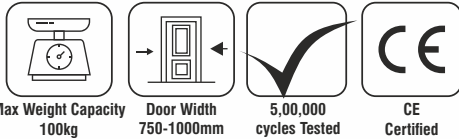


Specifications



- No digging or cutting of the floor is required
- Quick and easy installation
- For Interior Applications (Internal door)
- Suitable door thickness: 8-12mm
- Speeds adjustable No.1 closing speed : 85°- 30°
- Speeds adjustable No.2 soft closing speed : 30°- 0°.
- 1.00 MM SS cover plate secured with pin system mechanism
- CE Certified : Yes
- Opening angle of 140°double action, 90°hold-open
- Unique base design, 5mm backward and forward, 7mm left and right, 5° alignment adjustment
- Tested by Intertek as per EN 1154
- Finish : Satin




Keep the gaps as per drawing,
make sure the top and bottom
pivot center are well aligned.

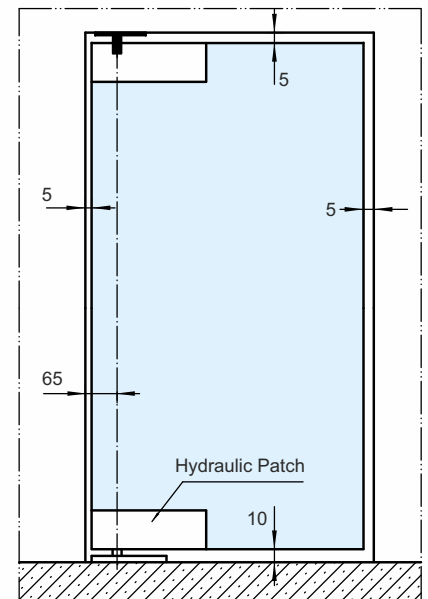


Glass Cutout

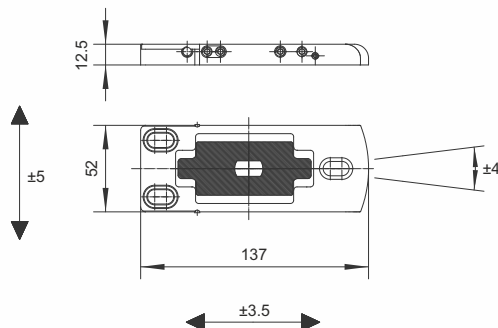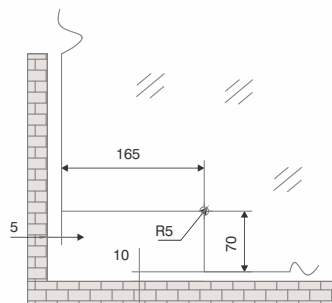



Dimension

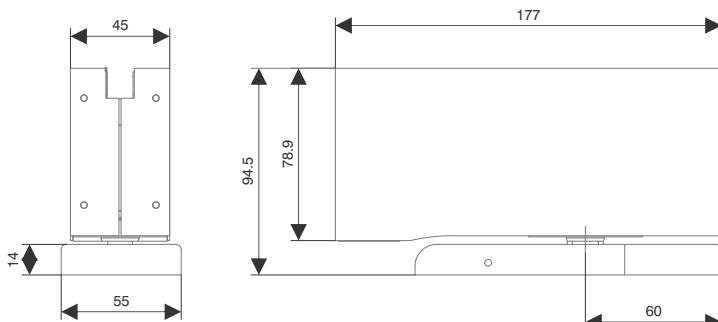

Functional Diagram

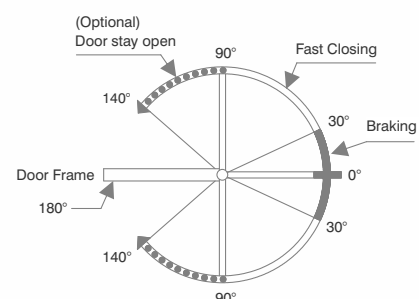



Non Digging Concealed Floor Spring / Hydraulic Patch Fitting

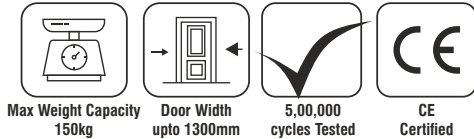

- No digging or cutting of the floor is required
- Quick and easy installation
- Suitable door thickness: 10-15mm
- Speeds adjustable No.1 closing speed : 85°- 30°
- Speeds adjustable No.2 soft closing speed : 30°- 0°.
- Maximum opening 150° and controlled 135°
- 1.00 MM SS cover plate secured with pin system mechanism
- Unique base design, 5mm backward and forward, 7mm left and right, 5° alignment adjustment
- Suitable for Fire/Smoke Doors upto 40 min, Testing done by Intertek as per EN 1634-1:2008
- Ambient temperature: -20°C to +50°C
- Finish : Satin




Keep the gaps as per drawing,
make sure the top and bottom
pivot center are well aligned.

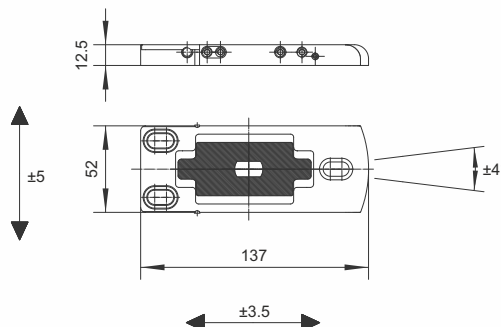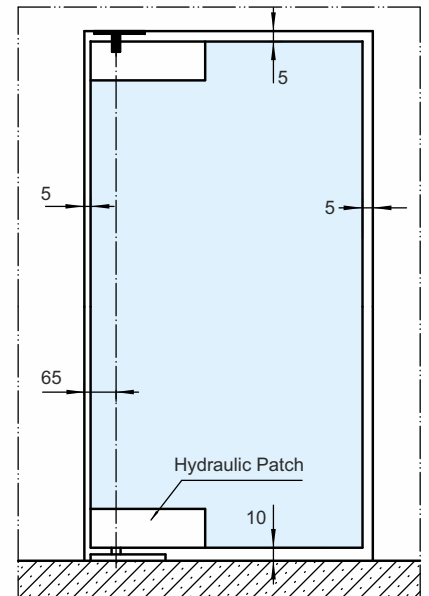[illegible]

A circular diagram illustrating the angular range of motion for a door. The circle is divided into segments by radial lines at 30° intervals, labeled from 0° to 180° and back to 0° (labeled as 30°, 60°, 90°, 120°, 150°, 180°, 150°, 120°, 90°, 60°, 30°). Key positions are labeled: 'Door Frame' at 180°, '(Optional) Door stay open' at 90°, 'Fast Closing' at 30°, and 'Braking' at 0°. The segments between 0° and 30°, and between 150° and 180°, are shaded with a stippled pattern.

PATCH FITTINGS





SPF-1

Over Panel Side Panel Connecting Patch

Specifications

- Cover plate : Premium Quality SS 304
- Cover secured with small 'L' key
- Pivot pin of 15mm diameter
- Adjustable pivot point 55/65mm
- Internal Body Material Casting : Aluminum Alloy
- Finish : Satin





SPF-2

Top Patch

Specifications

- Variable pivot point of 55 or 65mm
- With SS 304 cover plate
- Cover secured with small 'L' key
- Internal Body Material Casting : Aluminum Alloy
- Finish : Satin

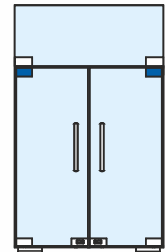



SPF-3

Bottom Patch

Specifications

- Variable pivot point of 55 or 65mm
- Compatible with all SKOAA Floor Springs
- With SS 304 cover plate
- Cover secured with small 'L' key
- Internal Body Material Casting : Aluminum Alloy
- Finish : Satin

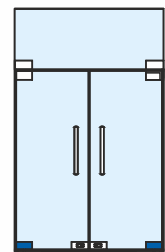



SPF-4


Wall Mounted Over Panel Patch with Pivot

Specifications

- Over Panel Patch Secured on to the Sidewall with Pivot
- Cover plate : Premium quality SS 304
- Pivot pin of 15mm diameter
- Cover secured with small 'L' key
- Internal Body Material Casting : Aluminum Alloy
- Finish : Satin

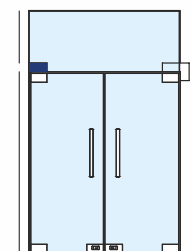

PATCH FITTINGS




SPF-610

Over Panel Side Panel Connector

Specifications

- Cover plate : Premium quality SS 304
- Cover secured with small 'L' key
- Internal Body Material Casting : Aluminum Alloy
- Finish : Satin


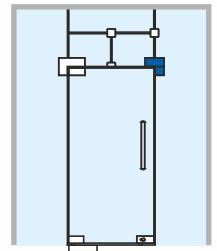


SPF-640

Wall to Glass Connecting Patch

Specifications

- Glass Connecting Patch for glass doors
- Cover plate : Premium quality SS 304
- Cover secured with small 'L' key
- Body Material Casting:-Aluminum Alloy
- Finish: Satin

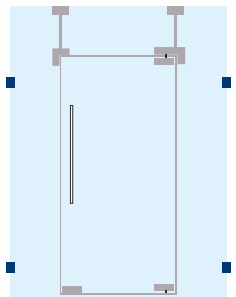



SPF-650

Glass to Glass Connecting Patch

Specifications

- Glass to Glass Connecting Patch with wall/ceiling
- Cover plate : Premium quality SS 304
- Cover secured with small 'L' key
- Body Material Casting:-Aluminum Alloy
- Finish: Satin

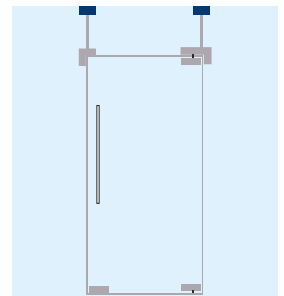

SSPF-GDP

Patch Pivot

secured on the top of glass door to accept the pivot



SFS-ACC-TPBP-1

Top & Bottom Pivot for
Wooden/Aluminium Door




SFS-ACC-TP/BP


Top & Bottom Pivot for
Wooden/Aluminium Door




PATCH FITTINGS GLASS CUTOUT

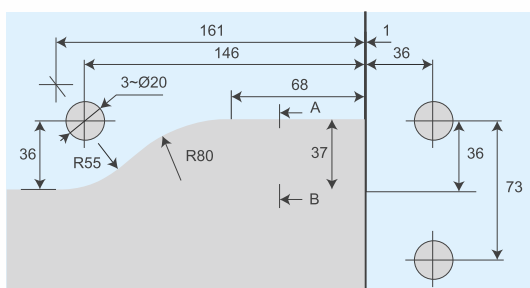

Model No. **SPF-1** Over Panel and side panel
with 15mm pivot glass cutout

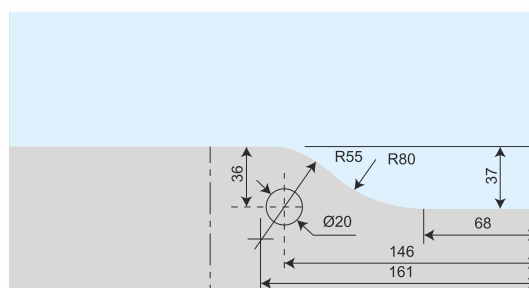

Model No. **SPF-2, SPF-3, SPF-4**
Top bottom and over panel patch



Model No. **SPF-610**
Connector for over panel
with insert glass cutout

PATCH LOCKS

SPL-1


Corner Patch Lock with Strike Plate

Specifications

- European profile brass cylinder and strike plate
- Dead bolt projection of 15mm (single throw)
- Three high security computer keys
- Cover plate made of premium quality SS 304
- Cover secured with small 'L' key
- Internal Body Material Casting : Aluminum Alloy
- Finish : Satin



Finishes :


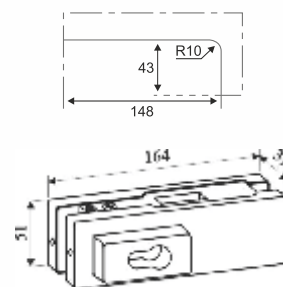


SPL-3A

Thumb Turn Lock

Specifications

- Multiple application, can be used for locking door on wall or floor
- Comes with Strike Plate
- Dead bolt projection of 10mm (single throw)
- Premium Quality SS 304 cover plate
- Internal body Material Casting : Aluminum Alloy
- Cover secured with small 'L' key
- Finish : Satin





SPL-3B

Strike Box for SPL-3A

Specifications

- Accept lever of SPL-3A
- Premium Quality SS 304 cover plate
- Internal body Material Casting : Aluminum Alloy
- Cover secured with small 'L' key
- Finish : Satin




SPL-4A-N-S

Glass Door Lock with Strike Plate - Glass to wall

Specifications

- Dual application, can also be used for sliding doors
- Suitable for 10mm & 12mm tempered / toughened Glass
- Requires no cutout in glass
- Cover : Premium Quality SS Grade 304
- Internal body material casting : Aluminum Alloy
- Finish : Satin

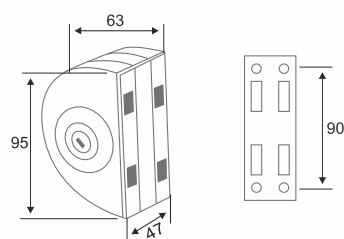


SPL-4A/4B-N

Patch Locks with Strike Box - Glass to Glass


Specifications

- Made of Premium Quality SS 304 material
- 3 brass dimple keys
- Suitable door thickness : 10mm -12mm tempered / toughened glass
- Direct installation without any glass cutout
- Smoothly opens over 4,00,000 times
- Grub screws to hold the glass tightly
- Suitable for Single leaf / Double leaf glass swing doors
- Internal body material casting : Aluminum Alloy
- Finish : Satin

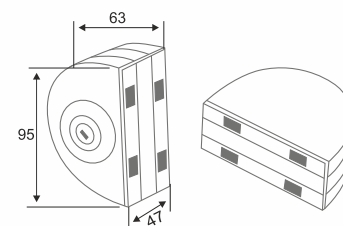

GLASS DOOR SLIDING SYSTEM

Suitable for Office Glass Doors



SKSL-44-A2

Roller for Glass Door - 80kgs



SKSL-33G

Floor Guide



SKSL-44-A3

Stopper



SKSL-44-A4

Cover Plate for Track



SKSL-44-B3

Track for Sliding Door Panel




SKSL-44-A2

Sliding Kit (80kgs)




Include : Roller, Floor Guide, Stopper, Cover Plate for Track

Specifications


- Roller Assembly
- Heavy duty sliding door roller
- Suitable for door weight up to 80Kgs
- Larger surface area to secure grip of the door
- Adjustable threaded rod for installation perfection
- Suitable for 10 mm tempered / toughened glass
- Premium Quality Stainless Steel Grade 304
- Finish : Bright chrome polish

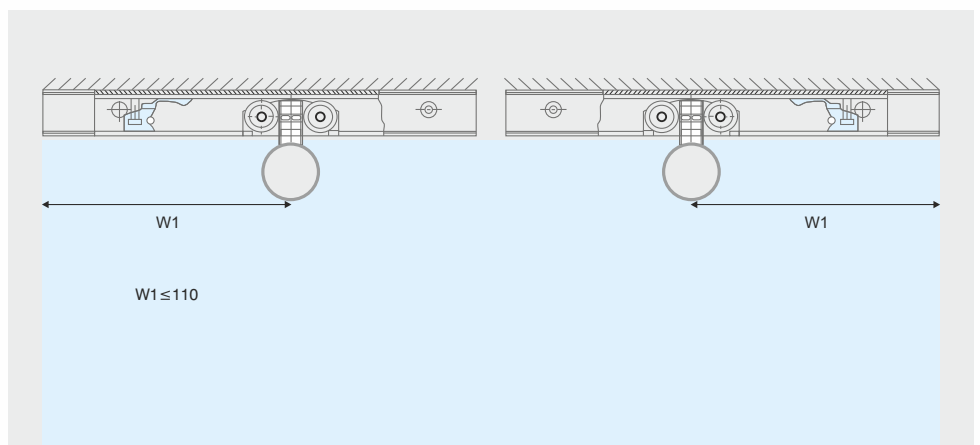

Glass cutout detail

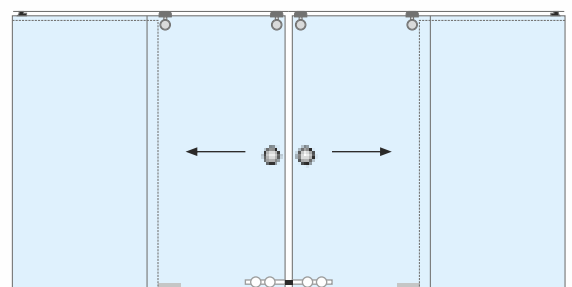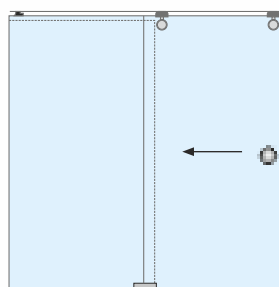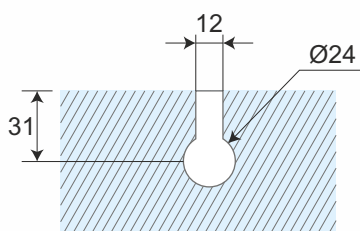


SHOWER SLIDING SYSTEM



SKSL-44-A1

Roller for Glass Door - 40kgs

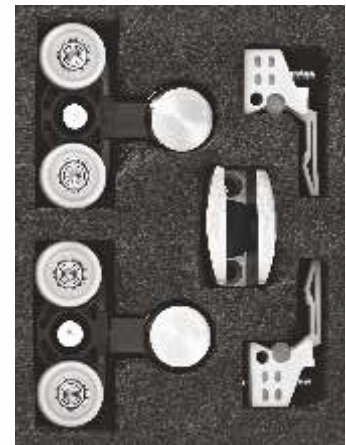

SKSL-44-A1

SSS Roller Assembly Glass door
Weight upto 40 kg



SKSL-33G

Floor Guide



SKSL-44-A3

Stopper


Specifications

- Four fiber reinforced plastic rollers of 30mm diameter
- Premium Quality Stainless Steel Grade 304
- Height adjustable glass holding points (10mm)
- Secure grip for the door
- Self aligning suspension of door
- Roller configuration for even distribution of load
- Independently connected rollers to prevent damage to track and rollers
- Suitable for 8mm/ 10mm /12mm glass
- Suitable for door weight 40kgs
- Finish : Satin






SKSL-44-B1

Track for Single Door & Fixed Glass Door Panel

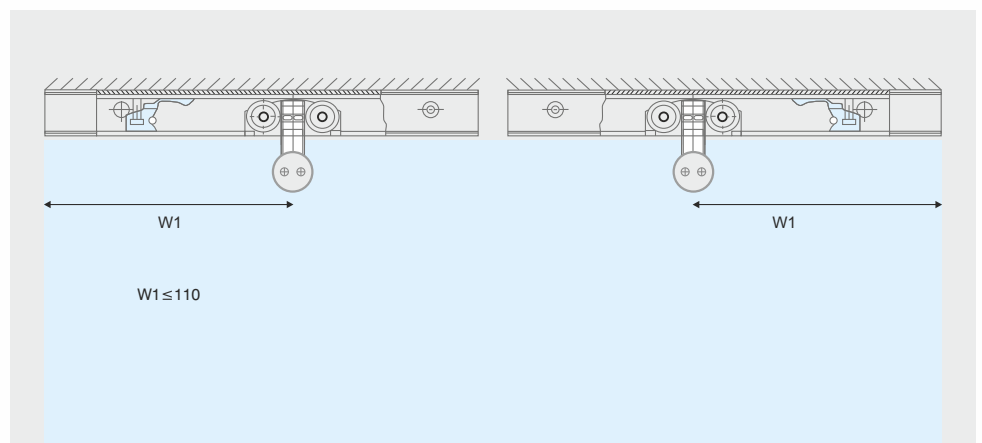

Glass cutout detail

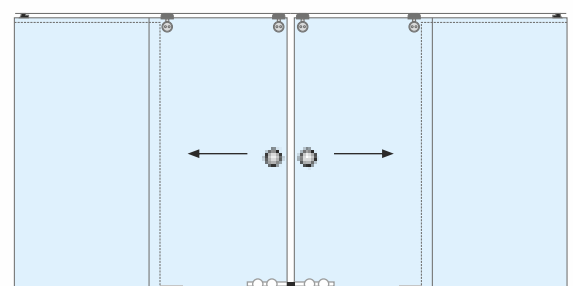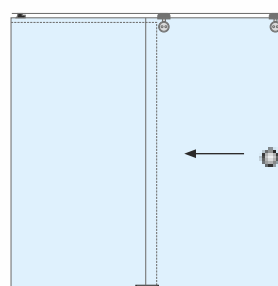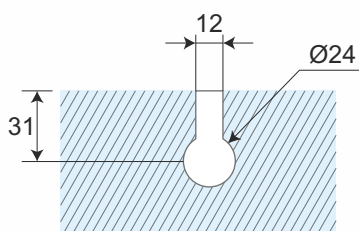

GLASS DOOR HANDLES

Specifications


- Push and Pull Handle with Back to Back installation
- SKOAA H type handles are suitable for use on Glass/Wooden/Metals Doors
- Applications : Residential, Industrial and Commercial space
- Includes PVC Gaskets to prevent the contact between glass and metal
- Supporting washer with raised beveling on the outer surface
- SS Grub screws kept out of sight
- Each SKOAA handle is of 304 grade Stainless steel material suitable for use in external environment
- Material : Premium Quality Stainless Steel Grade 304
- Finish : Double tone / Single tone
(Finish of PSS/SSS & Single Finish of SSS)





Handle Ø32 mm / Ø25 mm


| Overall length of Handle (A) | Centre to Centre of Hole (B) |
|------------------------------|------------------------------|
| 457 mm | 305 mm |
| 600 mm | 480 mm |
| 900 mm | 700 mm |
| 1100 mm | 900 mm |

Finishes :



Matte Black (MB)


Gold (GD)



Copper (CO)




SGH-55
Double Tone
Size : 32 x 305 x 457mm
SS 304



SGH-55
Double Tone
Size : 32 x 480 x 600mm
SS 304



SGH-55
Single Tone
Size : 32 x 700 x 900mm
SS 304



SGH-55
Single Tone
Size : 25 x 900 x 1100mm
SS 304

GLASS DOOR HANDLE D TYPE

Specifications

- Pull Handle With Back to Back installation on Glass/Wooden/Metals Doors
- In case of Wooden Extended Spindle would be provided on request
- Gaskets to prevent the contact between glass and metal
- Supporting washer with raised bevelling on the outer surface
- Grub screws kept out of sight
- Material:-Stainless Steel Grade 304
- Finish: Single Tone (Single Finish of SSS)

Handle Ø25 mm

Overall length of Handle (A)

350 mm

600 mm

Finishes :



Matte Black (MB)



Gold (GD)



Copper (CO)

**SGH-11**

Single Tone

SS 304**Specifications**

- Pull Handle With Back to Back installation on Glass Doors
- Gaskets to prevent the contact between glass and metal
- Supporting washer with raised bevelling on the outer surface
- Grub screws kept out of sight
- Material:-Stainless Steel Grade 304
- Finish: Single Tone (Single Finish of SSS)

Handle Ø22 mm

Overall length of Handle (A)

300 mm

450 mm

600 mm

Finishes :



Matte Black (MB)



Gold (GD)



Copper (CO)

**SGH-OFS-11**

Single Tone

SS 304

Shower Enclosure Solutions & System

SKOAA Magnum and Neon premium fittings series ensure optimum quality of plating without compromising on aesthetics and durability. Our glass fittings undergo rigorous and stringent quality testing to withstand high humidity and different water qualities. Also having high corrosion resistant properties, our glass fittings are tested as per ASTM B117 standards.

SHOWER HINGES

GLASS CONNECTORS

SLIDING SYSTEM

ACCESSORIES



Finish : Mirror
Coating: CP/PSS
Alloy: Brass/SS



Finish : Matt
Coating: Electro-plating
Alloy: Brass
Color: Black




Finish : Mirror
Coating: PVD
Alloy: Brass
Color: Gold & Rose Gold




CREATE YOUR OWN DESIGN WITH A VARIETY OF SOLUTIONS

Frameless Shower Enclosures separate dry area and wet areas in the bathroom. Generally used along with 8mm or 10mm tempered glass, these enclosures are customized as per your preference, SKOAA offers exclusively crafted range of glass fittings in brass as well as in SS304 with multiple options of finishes to choose from- Bright Chrome Polish on brass, Polish Stainless Steel on SS304 and Matte Black electroplating on brass (MB) and PVD Rose gold and Gold PVD coating on brass.


Openable Door Options




One Leaf Door




One Leaf Door & One Fixed Glass Panel




One Leaf Door & Two Fixed Glass Panels




One Leaf Door & One Fixed Glass Panel (L Shape)



One Leaf Door & Two Fixed Glass Panels (L Shape)




One Leaf Door & Two Fixed Glass Panels (Pentagonal Shape)




One Leaf Door (Glass Side) & Two Fixed Glass Panels (L Shaped)


Sliding Screen Options



Sliding Door



Two Leaf Doors & Two Fixed Glass Panels (L-shape)



One Leaf Door & Two Fixed Glass Panels (L-shape)

MAGNUM BRE SERIES (Brass)



Finishes :



SSBH-1

Wall to Glass Hinge



- Centrally positioned pivot line
- Can be used for double action door
- Secure holding with glass
- Comes with gaskets to prevent glass damage
- Glass thickness 8mm to 10mm



SSBH-2

180 degree Glass to Glass



- Glass to glass hinge 180°
- Can be used for double action door
- Material : Brass
- Glass Thickness 8mm to 10mm
- Comes with gaskets to prevent glass damage



SSBH-3

135 degree Glass to Glass



- Glass to glass hinge 135°
- Can be used for double action door
- Material : Brass
- Glass Thickness 8mm to 10mm
- Comes with gaskets to prevent glass damage



SSBH-4

90 degree Glass to Glass



- Glass to glass hinge 90°
- Can be used for double action door
- Material : Brass
- Glass Thickness 8mm to 10mm
- Comes with gaskets to prevent glass damage



SSBH-5

Wall to Glass Bracket

- To hold the fixed glass to wall
- Secure holding with glass
- Comes with gaskets to prevent glass damage
- High rigidity





SSBH-OFS-1

Door Offset Hinge

Wall to Glass


- Offset Positioned Pivot Line
- Can be used for double action doors
- Secure holding with glass
- Comes with gaskets to prevent glass damage



SSBH-T3G

T-Shower Hinge

- For adjoining two opening doors
- Glass door maximum thickness 8 mm – 10 mm
- Glass Door maximum width – 700 mm
- Built in Self- closing function activates once door reaches 30 degree
- Opening inward and outward both but recommended inward opening
- Material : Premium Quality Brass


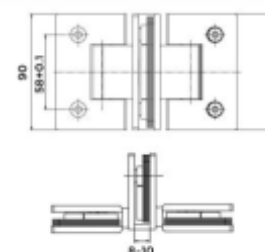


NEON SRE SERIES (SS 304)

SSSH-11

Wall to Glass Hinge



- Centrally positioned pivot line
- Can be used for double action door
- Secure holding with glass
- Comes with gaskets to prevent glass damage
- Glass thickness 8mm to 10mm
- Finish: PSS



SSSH-22

180 degree Glass to Glass



- Glass to glass hinge 180°
- Can be used for double action door
- Material : Stainless Steel 304 Grade
- Comes with gaskets to prevent glass damage
- Glass Thickness 8mm to 10mm
- Finish: PSS



SSSH-33

135 degree Glass to Glass



- Glass to glass hinge 135°
- Material : Stainless Steel 304 Grade
- Comes with gaskets to prevent glass damage
- Glass Thickness 8mm to 10mm
- Finish: PSS



SSSH-44

90 degree Glass to Glass



- Glass to glass hinge 90°
- Can be used for double action door
- Material : Stainless Steel 304 Grade
- Comes with gaskets to prevent glass damage
- Glass Thickness 8mm to 10mm
- Finish: PSS



SSSH-55

Wall to Glass Bracket



- To hold the fixed glass to wall
- Secure holding with glass
- Comes with gaskets to prevent glass damage
- High rigidity
- Finish : PSS



SSSH-OFS-11

Door Offset Hinge Wall to Glas

- Offset Positioned Pivot Line
- Can be used for double action doors
- Secure holding with glass
- Comes with gaskets to prevent glass damage
- Finish: PSS



MAGNUM BRE GLASS CONNECTORS (Brass)

Specifications

- Material : High Quality Brass
- Finish : Bright Chrome polish

Finishes :



Matte Black
(Electro-Plating)



Gold
(PVD Coating)

Rose Gold
(PVD Coating)





SGC-1A

Floor/Wall to Glass Connector





SGC-2A

135 Degree Glass to Glass





SGC-3A

90 Degree Glass to Glass





SGC-4A

90 Degree Floor/Wall to Glass



SGC-5A

180 Degree Glass to Glass





NEON SRE SERIES (SS 304)





SSGC-1A

Floor/Wall to Glass Connector



SSGC-4A

90 Degree Floor/Wall to Glass



SHOWER SLIDING SYSTEM

Finishes :



Matte Black (MB)



Gold (GD)



Rose Gold (RG)



SKSL-ED-SYS-11

Sliding Kit

Include : Roller set, Track to Glass Holder,
Floor Guide, Wall to Track Connector

Premium Quality SS 304



SKSL-11-A1

Roller



SKSL-11-A2

Track to Glass Holder



SKSL-11-A3

Stopper



SKSL-11-A4

Floor Guide



SSSKH-1

Wall to Track Connector



SKSL-ED-11-A5

Safety Pin

SHOWER SLIDING SCREEN

Specifications

- Maximum Door Weight: 50kgs
- Maximum Door Width: 750mm
- Maximum Door Height: 2000mm
- Maximum Glass Thickness: 8-10mm

SSSL-SYS-180° (2M)

Wall to Wall System



SSSL-SYS-90° (1.65mx2)


Corner Entry System



SSSL-SYS-A1

Stainless Steel Knob Clamp Roller

- Finish : Polished or Satin Stainless Steel
- Suits 8-10mm Glass Thickness



SSSL-SYS-A2


Stainless Steel Mounting Bracket (LH/RH)

- Finish : Polished or Satin Stainless Steel



SSSL-SYS-A3

Nylon End Stopper with Catch Device



SSSL-SYS-A4

Single-U Nylon Floor Guide



SSSL-SYS-A5

Track Corner Joint

- Finish : Polished or Satin Stainless Steel (for Corner Entry System)



SSSL-SYS-A6

Aluminum Top Track

- Finish : Polished or Satin Aluminum

SHOWER CONNECTOR & ROD

Finishes :



Matte Black
(Electro-Plating)



Gold
(PVD Coating)




Rose Gold
(PVD Coating)

SSKH-1

Holds the Pipe with Wall for Glass Stabilization


- Perfect radius for the pipe
- Grub screws to hold the pipe
- Firm seating with wall
- For terminating the pipe Ø19mm
- Premium Quality Brass
- Finish : Bright Chrome Polish



SSKH-2

Brass Reinforcing Bar Support


- Perfect radius for the pipe
- Firm seating with glass
- Through hole for the pipe
- For terminating the pipe Ø19mm
- Premium Quality Brass
- Finish: Bright Chrome Polish



SSKH-2A

Brass Reinforcing Bar Support

- To hold the pipe of Ø19mm for glass stabilization
- Grub screw to hold the pipe of Ø19mm
- Blind hole on one end
- For terminating the pipe Ø19mm




SSKH-3

Reinforcing Rod Connector Universal

PIPE CONNECTOR

- Grub screws to hold the pipe
- Adjustable at any angle
- For terminating the pipe Ø19mm
- Premium Quality Brass
- Finish : Bright Chrome polish



SSKH-ACC-19 (2/2.5/3 Mtr.)

Reinforcing Pipe

- 19mm outer diameter pipe
- Available Length 2mtr. & 3mtr.
- Stainless Steel Grade 304
- Finish: PSS/SSS



SHOWER TOWEL BAR HANDLES & KNOBS

Finishes :



SKSL-HN-50

Sliding Door Handle

- Premium Quality Stainless Steel Grade 304
- Finish : Satin



SGH-TB1

Towel Bar with Handle (Ø19mm)

- Comes along with gaskets to prevent glass damage
- Perfect handling design
- Sleek construction
- Towel bar outside and handle inside
- Premium Quality Stainless Steel Grade 304
- Finish: PSS/SSS



SGH-TB-2

Towel Bar Handle with Knob inside

- Premium Quality Stainless Steel Grade 304
- Finish : Satin



SDK-1

Glass Door Knob

- Comes along with gaskets to prevent glass damage
- Sleek construction
- Perfect handling design
- Premium Quality Stainless Steel Grade 304
- Finish: PSS/SSS



SDK-2

Glass Door Knob


- Comes along with gaskets to prevent glass damage
- Sleek construction
- Perfect handling design
- Premium Quality Stainless Steel Grade 304
- Finish: PSS/SSS



SSPF-SS

Profile for Glass Shower Screen

- Suitable for glass thickness 10-12mm
- Profile Dimensions : 25x14x25mm
- Available in Multiple Finishes
- Premium Quality Stainless Steel Grade 304

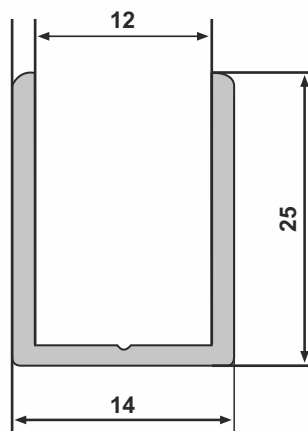


SSPF-GD





SSPF-MB



SSPF-SS




SSPF-RG

Finishes :   
Matte Black (MB) Gold (GD) Rose Gold (RG)

PVC SEAL (2.2/2.5/3 Mtr.)


SPS-1 STD

Wall Seal

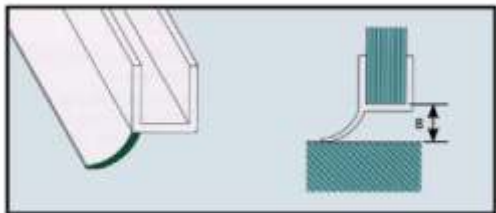


SPS-2 STD

Central Seal

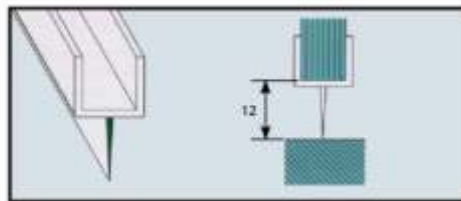


SPS-3 STD (Soft)

Central 180° Weather Seal

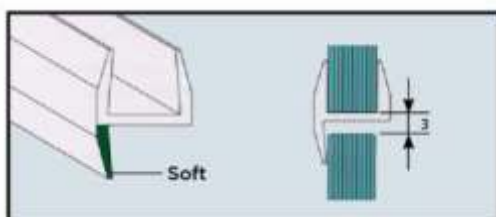

SPS-4 STD

Central 180° Weather Seal

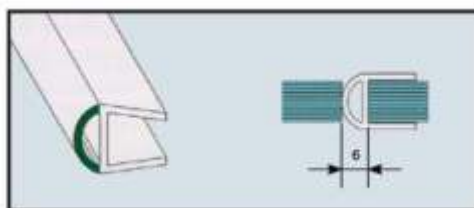


SPS-M1 10mm STD

180° Magnetic Seal



SPS-M2 10mm STD

135° Magnetic Seal

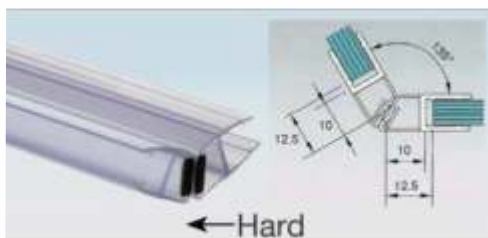

SPS-M3 10mm STD

90° Magnetic Seal



SPS-M1 10mm (Gold) 90°/180°

Magnetic Seal



SPS-M1 10mm (Black) 90°/180°

Magnetic Seal



SPS-M1 10mm (Rose Gold) 90°/180°

Magnetic Seal



Glass Facade Spider & Canopy Fittings

SKOAA top of the line structural spider fittings gives architects maximum creative flexibility, presenting a distinctive and clean design statement.

SKOAA spider fittings made out of premium quality superior grade material which makes the fittings strong and sturdy and able to withstand extreme weather conditions.

Supplied in variants ranging from one-four arm configurations, all SKOAA Standard series structural spider fittings are manufactured from high-quality 316-grade stainless steel, and all castings are independently tested, ensuring superior quality, enduring performance and above all zero pain points for or customers.

SPIDER FITTING WITHOUT FIN

SPIDER FITTING WITH FIN

ROUTE LS

SPLICE PLATES

FIN PLATES

CANOPY SYSTEMS



SPIDER FITTING WITHOUT FIN (SS316)


(220mm Arm Distance)

Specifications

- 220mm arm
- Attached to a fixed structure
- Installed with routels
- Stainless Steel Grade 316
- Finish: PSS / SSS


SSP-B-221

One Way Spider Without Fin

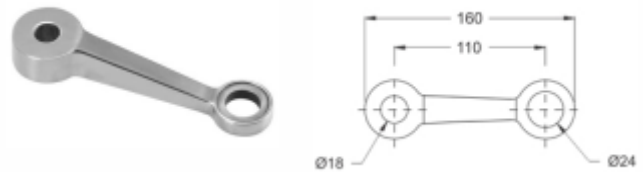


SSP-B-222

180° Two Way Spider Without Fin

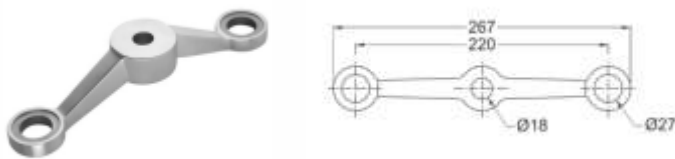


SSP-B-222A

90° Two Way Spider Without Fin

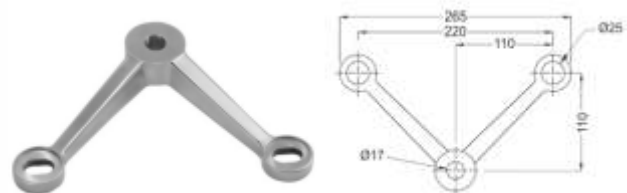


SSP-B-223

Three Way Spider Without Fin

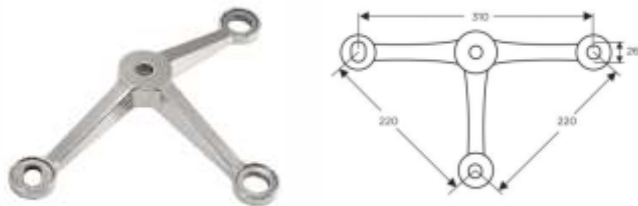

SSP-B-224

Four Way Spider Without Fin

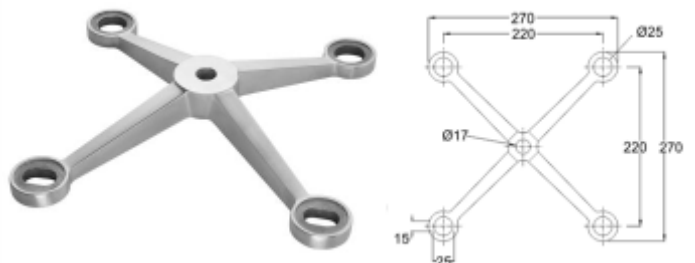

SPIDER FITTING WITH FIN (SS316)

(200mm Arm Distance)

SSP-A22

One Way Spider With Fin




SSP-A2

Two Way Spider With Fin



SSP-A44

Two Way Spider for Ceiling/ Wall

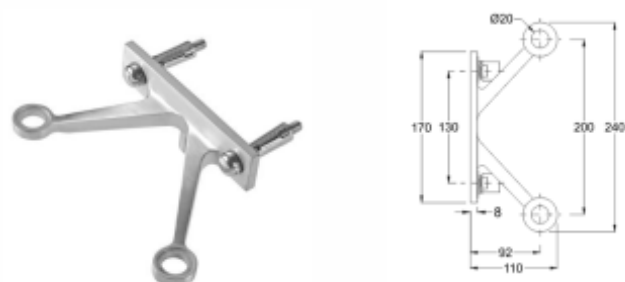

SSP-A4

Four Way Spider With Fin



SPIDER ACCESSORIES

Routel (SS316)

SSP-AFB-36-CS

Articulate Bolt (Counter Sunk Head)



SSP-FB-FL

Fixed Bolt (Flat head)



SSP-FB-CS

Fixed Bolt (Counter Sunk Head)



SSP-SH-01 (SS304)

Spider Holder



SSP-AFB-36-FL

Articulate Bolt (Flat Head)



Fin Plate (SS316)

SSP-FP-200

Fin Plate 200mm



SSP-FP-250

Fin Plate 250mm



SSP-FP-300

Fin Plate 300mm



SSP-FP-350

Fin Plate 350mm



SSP-FP-400

Fin Plate 400mm



Splice Plate (SS316)

SSP-SP-200

Splice Plate 200mm



SSP-SP-250

Splice Plate 250mm



SSP-SP-300

Splice Plate 300mm



SSP-SP-350

Splice Plate 350mm



SSP-SP-400

Splice Plate 400mm



FRAMELESS GLASS CANOPY SYSTEMS

SCF-01

Wall to Glass Connector
Finish: SSS



SCF-02

Adjustable Glass Connector
for SCF-316
Finish: SSS



SCF-03

Wall Fitting for SCF 316
Finish: SSS



SCF-ROD (16mm)

for SCF-316
Finish: SSS





*demista*TM
Clearly Perfect

Demista : The original mirror heating pad

- Manufactured in the UK
- 10 Year Guarantee
- Over 400 sizes available
- Available in 12V, 24V 120V and 230V versions
- Approved to European and International standards
- Custom made sizes available
- Self adhesive
- Saves time and money, no need to clean the mirror everyday



The demista mirror heat pad can be installed on virtually any mirror. Once adhered to the mirror simply connect the pad into the bathroom switched lighting circuit, or they can be installed with any room lighting systems.



Demista Range

Large variety of widths available, 150mm, 200mm, 300mm, 400mm, 500mm, 600mm, 700mm, which come in lengths from 250mm to 2490mm in 40mm increments. Demista also supply a complete range of transformers and door loops for the 12V and 24V which are generally installed on cabinet / vanity unit doors or within the shower cubicle.



Intelligent Nano-tech Coating

SKOAA is the pioneer of clutter breaking Glass Hardware solutions in India and is committed to deliver sustainable solutions, come what may. This has led us to introduce nano-tech empowered solutions for saving water and reducing environmental impact.

SKOAA Shield hydrophobic coating helps to reduce the frequency of cleaning & water usage, while simultaneously reducing the need for harsh chemicals. We are delighted to offer you sustainable solutions that will make light work of cleaning and help keep glass surfaces sparkling.

SKOAA Shield for glass & SKOAA DuraShield for hardware is an optically clear protective coating that chemically bonds to the surface, creating a nonstick barrier resistant to corrosion, etching, and staining. Treated glass becomes both hydrophobic and oleophobic (water & oil repellent) protecting against most forms of dirt, minerals and grime.



Customer's Perspective about SKOAA



Architect Kapil Mehta
(Kapil Mehta & Associates)

“ Just to share my experience with SKOAA, the exhaustive product range with beautiful colors and finish made us comfortable recommending SKOAA for our projects. Our clients are happy with competitive price range and we are more than satisfied with the premium and sustainable solutions for glass hardware. ”

“ Skoaa surely is a tough competition for most of the well established brands when it comes to glass hardware due to the variety of solutions and smoothness in mechanism. We will recommend Skoaa products with confidence for all our projects because we definitely want our clients to use what is the best in the market. ”



Architect Shruti Maheshwari
(Studio Midas)



Deepak Sharma
(Trusty Udyan Care)

“ Recently, I got a shower cubicle installed at my residence and SKOAA Hardware was used during the installation. The workmanship and quality of products is Impeccable. I would strongly recommend and advocate to use SKOAA products. One doesn't have to look beyond that. ”

“ We have used SKOAA Glass hardware for our Shower enclosures and found that they have exceptional product quality. It's already decided that our next home also would be fitted with Skoaa glass hardware and fittings. ”



Ankit Garg
(Chartered Accountant)

OUR CLIENTS





Scan to visit our website

SKOAA OVERSEAS LLP

Regd. Office : 92, Sreshtha Vihar, Delhi-110092 (INDIA)

Sales Office : B-18, DSIDC, Patparganj Industrial Area, Delhi-110092 (INDIA)
Ph.: 011-41501862 | Mob.: +91-9810090608, 8700288239 | www.skoaa.co.in